



Blue (/52) - PL-L, PL-S

PL-S 9W/52/2P 1CT/6X10BOX

By emitting light almost entirely within the 400 to 500 nm bandwidth and peaking at 450 nm, Philips PL-L/PL-S color 52 lamps have no radiation from the short wave UVB. waveband. They are therefore suitable to be used in systems for applications such as Agriculture and Neonatal Jaundice Phototherapy

Warnings and Safety

- lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take them to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Photobiological safety – IEC 62471 - Risk Group 2. CAUTION - Possibly hazardous optical radiation emitted from these products.

Product data


General Information		Voltage (Nom)		60 V	
Cap-Base	G23				
Life to 50% Failures (Nom)	8,000 hour(s)				
Useful Life (Nom)	2,000 hour(s)				
Light Technical		Mechanical and Housing			
Color Code	52	Bulb Shape	2XT12		
Luminous Flux	130 lm	Net Weight (Piece)	32.000 g		
Luminous Efficacy (rated) (Nom)	15 lm/W				
UV Depreciation at 1000 h	20 %	Approval and Application			
		Mercury (Hg) Content (Nom)	3.0 mg		
Operating and Electrical		Product Data			
Power Consumption	8.6 W	Order product name	PL-S 9W/52/2P 1CT/6X10BOX		
Lamp Current (Nom)	0.17 A	Full product name	PL-S 9W/52/2P 1CT/6X10BOX		
		Full product code	871150064471880		
		Order code	927901705203		
		Material Nr. (12NC)	927901705203		

Blue (/52) - PL-L, PL-S

Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500644718
Numerator - Packs per outer box	60


EAN/UPC - Case	8711500644732
----------------	---------------

Dimensional drawing



Product	D1 (max)	D (max)	A (max)	B (max)	C (max)
PL-S 9W/52/2P 1CT/6X10BOX	13 mm	28 mm	129 mm	144.5 mm	167.5 mm

Photometric data

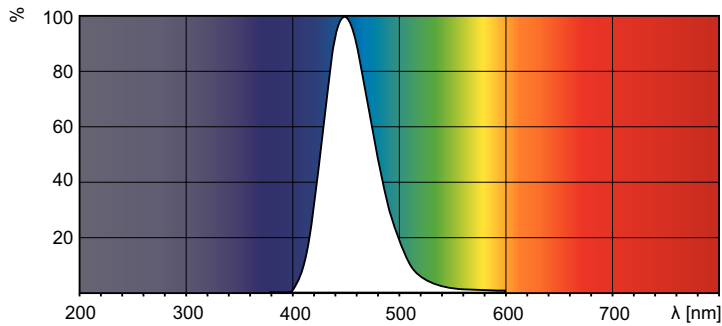

Spectral Power Distribution Colour - PL-S 9W/52/2P 1CT/6X10BOX

